




68ARM1 3U OpenVPX Single Board Computers

3U OpenVPX ARM SBC with Three I/O Function Module Slots

NAI's 68ARM1 is a 3U OpenVPX ARM® Cortex®-A9 - based, Single Board Computer (SBC) that can be configured with up to three smart function modules. Ideally suited for rugged defense, commercial aerospace, and industrial applications, the 68ARM1 delivers off-the-shelf solutions that accelerate deployment of SWaP-optimized systems. The ARM® Cortex®-A9 processor is a low power, cost-sensitive, multi-core processor delivering exceptional levels of performance and power efficiency with all the functionality required in rugged, embedded SWaP-optimized programs for the Defense and Aerospace industries.

The 68ARM1 includes BSP and SSK support for Wind River® VxWorks® and for Xilinx® PetaLinux and DDC-I Deos. In addition, SSKs are supplied with source code and board-specific library I/O APIs to facilitate system integration.

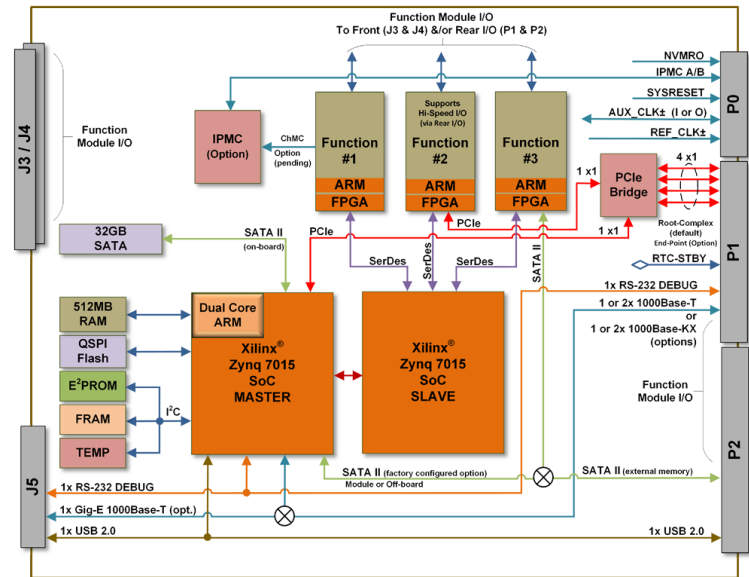

Features

- **OpenVPX™ Profile:** SLT3-PAY-1F2U-14.2.12
 - Data plane: 4x1 PCIe
 - Control plane: 2x 10/100/1000 Base-T or 2x 1000 Base-KX
- **ARM® Cortex®-A9 Dual Core 800MHz Processor**
 - 512 MB DDR3 SDRAM
 - 32 GB On-Board SATA II NAND Flash available
 - On-Board module 3 or External SATA II port access
- **< 10 W MB power dissipation**
- **Supports three NAI smart I/O function modules**
 - COSA® architecture
 - 100+ modules to choose from
 - Customer-configurable
 - Independent x1 SerDes interface to each function module slot
- **Front and/or rear I/O**
- **I²C bus to rear I/O**
- **Connectivity**
 - 2x 10/100/1000 Base-T Ethernet
 - 2 to rear or 1 to rear and 1 to front I/O; or 2x 1000Base-KX to rear I/O
 - 1x RS-232 to front or rear I/O
 - 1x USB 2.0 port to rear or front I/O
- **Operating System Support**
 - Wind River®
 - VxWorks®
 - Xilinx® PetaLinux OS
 - DDC-I Deos™
- **Commercial or rugged applications**
- **Operating temp:**
 - -40°C to +71°C
 - Rugged -40° C to +85° C
- **Continuous Background BIT**
- **Intelligent I/O library support included**
- **VICTORY Interface Services (Contact factory)**

Select up to 3 independent functions for your application

I/O Modules					
Function	Module	Description	Function	Module	Description
Analog-to-Digital	<u>AD1</u>	12 CH. A/D, ±10 V, Dedicated, 256 kHz (max), Sigma-Delta	Digital-to-Analog	<u>DA5</u>	2 CH. D/A, ±2A, @ 60 VCC max., voltage or current command output (VCC provided from external source)
	<u>AD2</u>	12 CH. A/D, ±100 V (max), Dedicated, 256 kHz (max), Sigma-Delta	Digital IO - Differential Transceiver	<u>DF1</u>	16 CH. Differential I/O, Input: -10 V to +10 V (422), -7 V to +12 V (485) Output: -.25 V to +5 V
	<u>AD3</u>	12 CH. A/D, ±25 mA, Dedicated, 256 kHz (max), Sigma-Delta		<u>DF2</u>	16 CH. 16 Channel Enhanced Differential I/O
	<u>AD4</u>	16 CH. A/D, ± 10 V, Multiplexed, 500 KHz Agg / 8 Ch, SAR	Discrete IO - Multichannel, Programmable	<u>DT1</u>	24 CH. Discrete I/O, 0-60 VDC Input/Output, Max Iout 500 mA - 2 A, Source/Sink (out)
	<u>AD5</u>	16 CH. A/D, ± 50 V, Multiplexed, 500 KHz Agg / 8 Ch, SAR		<u>DT2</u>	16 CH. Discrete I/O, ±80 V Input/Output, Max Iout 600 mA, Isolated/Ch Switch (out)
	<u>AD6</u>	16 CH. A/D, ± 100 V, Multiplexed, 500 KHz Agg / 8 Ch, SAR		<u>DT3</u>	4 CH. Discrete I/O, ±100 V Input/Output, Max Iout 3A, Isolated/Ch Switch/Bridge
	<u>AD E</u>	16 CH. A/D, ±10 V, Individual 16-bit SAR, 200 kHz max., Simultaneous Sampling		<u>DT4</u>	24 CH. Enhanced DT1
	<u>AD F</u>	16 CH. A/D, ±100 V, Individual 16-bit SAR, 200 kHz max., Simultaneous Sampling		<u>DT5</u>	16 CH. Enhanced DT2
	Digital-to-Analog	<u>AD G</u>	16 CH. A/D, ±25 mA, Individual 16-bit SAR, 200 kHz max., Simultaneous Sampling	Relay	<u>RY1</u>
<u>DA1</u>		12 CH. D/A, ± 10 V, 25 mA Per Channel, Current or Voltage Control	<u>RY2</u>		4 CH. Relay, 220V/2A @ 60W/62.5VA (Max), Latching
<u>DA2</u>		16 CH. D/A, ± 10 V, 10 mA Per Channel, No Current Control	Digital IO - TTL, CMOS	<u>TL1</u>	24 CH. TTL I/O, Standard Functionality, Programmable
<u>DA3</u>		4 CH. D/A, ±40 V, ±100 mA, Voltage or Current Output		<u>TL2</u>	24 CH. TTL I/O, Enhanced Functionality, Programmable
<u>DA4</u>	4 CH. D/A, ± 20 to ± 80, 10 mA, Voltage Control Only				
Measurement & Simulation Modules					
Function	Module	Description	Function	Module	Description
AC Reference	<u>AC2</u>	2 CH. AC Reference Source, 47 Hz - 20 KHz, ± 3% Acc, 2 - 28 Vrms, 6 VA (Max/Ch) Power	LVDT RVDT Measurement and Simulation	<u>LD5</u>	4 CH. LVDT/RVDT to Digital, 28-90 Vrms Input, 2-115 Vrms Exc, 47 Hz - 1 KHz Freq
	<u>AC3</u>	2 CH. AC Reference Source, 47 Hz - 2.5 KHz, ± 3% Acc, 28 - 115 Vrms, 6 VA (Max/Ch) Power		<u>RT1</u>	8 CH. Resistance Temperature Detectors (RTD), 2, 3, or 4 wire, 16 Bit Res, 16.7 Hz/Ch
LVDT RVDT Measurement and Simulation	<u>LD1</u>	4 CH. LVDT/RVDT to Digital, 2-28 Vrms Input, 2-115 Vrms Exc, 47 Hz - 1 KHz Freq	Thermocouple and RTD Measurement	<u>TC1</u>	8 CH. Thermocouple, 4.17 - 470 Hz, ±100 mV A/D
	<u>LD2</u>	4 CH. LVDT/RVDT to Digital, 2-28 Vrms Input, 2-115 Vrms Exc, 1 KHz - 5 KHz Freq		<u>TR1</u>	8 CH. Thermocouple (TCx) & Resistance Temperature Detectors (RTD), programmable per channel
	<u>LD3</u>	4 CH. LVDT/RVDT to Digital, 2-28 Vrms Input, 2-115 Vrms Exc, 5 KHz - 10 KHz Freq	Strain Gauge Measurement	<u>SG1</u>	4 CH. Strain Gauge, 4.7 Hz - 4.8 KHz, Measurement, Conventional 4-Arm Bridge
	<u>LD4</u>	4 CH. LVDT/RVDT to Digital, 2-28 Vrms Input, 2-115 Vrms Exc, 10 KHz - 20 KHz Freq	Variable Reluctance	<u>VR1</u>	8 CH. Variable Reluctance Signal Input and General-Purpose Pulse Counter, ±100 V, 100 kHz (max)

Communication Modules					
Function	Module	Description	Function	Module	Description
ARINC Communications	<u>AR1</u>	12 CH. ARINC 429, 100 KHz or 12.5 KHz, RX/TX, 256 Word Tx/Rx Buffer	MIL-STD-1553B	<u>FTD</u>	1 CH. MIL-STD-1553 (AMC), BC, RT, BM, BM/RT, 128 KB RAM, Direct Coupled
	<u>AR2</u>	1 CH. ARINC 568 (CH-1, RX & TX) & 1 Channel ARINC 579 (CH-2, Programmable RX or TX), 1024-Word TX & RX Buffers per Ch.		<u>FTE</u>	2 CH. MIL-STD-1553 (AMC), BC, RT, BM, BM/RT, 128 KB RAM Per Channel, Direct Coupled
CANBus Communications	<u>CB1</u>	8 CH. CANBus, CAN 2.0 A/B, 16 K RX/TX Buffer, 1 Mb/s Max Data Rate		<u>FTF</u>	4 CH. MIL-STD-1553 (AMC), BC, RT, BM, BM/RT, 128 KB RAM Per Channel, Direct Coupled
	<u>CB2</u>	8 CH. CANBus, J1939, 16 K RX/TX Buffer, 500 kb/s Max Data Rate	MIL-STD-1760	<u>FTJ</u>	1 CH. MIL-STD-1760 (1553), BC, RT, BM, BM/RT, 128 KB RAM, Transformer Coupled
	<u>CB3</u>	8 CH. CANBus, CAN 2.0 A/B (CB1) or J1939 (CB2) protocol layer programmable per channel		<u>FTK</u>	2 CH. MIL-STD-1760 (1553), BC, RT, BM, BM/RT, 128 KB RAM Per Channel, Transformer Coupled
Ethernet NIC Interface	<u>EM1</u>	2 CH. Dual Ethernet I/F, Intel 82850, 10/100/1000	Serial Communications	<u>SC1</u>	4 CH. Serial, RS-232/422/423 (MIL-STD-188C)/485, Non Isolated
MIL-STD-1553B	<u>FTA</u>	1 CH. MIL-STD-1553 (AMC), BC, RT, BM, BM/RT, 128 KB RAM, Transformer Coupled		<u>SC2</u>	4 CH. Serial, RS-232/422/423 (MIL-STD-188C)/485, Isolated Per Channel and From Ground
	<u>FTB</u>	2 CH. MIL-STD-1553 (AMC), BC, RT, BM, BM/RT, 128 KB RAM Per Channel, Transformer Coupled		<u>SC3</u>	8 CH. (max) RS-232/422/485 Serial Comms or GPIO, Programmable, Non-isolated
	<u>FTC</u>	4 CH. MIL-STD-1553 (AMC), BC, RT, BM, BM/RT, 128 KB RAM Per Channel, Transformer Coupled		<u>SC7</u>	4 CH. Serial, RS-232/422/423 (MIL-STD-188C)/485, Non-Isolated w/ (4) SYS-GND pins provided
Combination Modules					
Function	Module	Description	Function	Module	Description
Combo	<u>CM5</u>	1 CH. Combination, MIL-STD-1553 (2-Ch, redundant) & ARINC 429/575 (8-Ch), 100 KHz or 12.5 KHz, RX or TX, 256 Word Tx/Rx Buffer	Combo	<u>CM8</u>	1 CH. Combination, MIL-STD-1553 (AMC), 2-Ch. Dual-redundant & 12-Ch. Discrete I/O, 0-60 VDC Input/Output, Max Iout 500 mA - 2 A, Source/Sink (out)

Architected for Versatility

NAI's Configurable Open Systems Architecture™ (COSA®) offers a choice of over 100 smart I/O, communications, or Ethernet switch functions, providing the highest packaging density and greatest flexibility of ruggedized embedded product solutions in the industry. Preexisting, fully-tested functions can be combined in an unlimited number of ways quickly and easily.

One-Source Efficiencies

Eliminate man-months of integration with a configured, field-proven system from NAI. Specification to deployment is a seamless experience as all design, state-of-the-art manufacturing, assembly and test are performed - by one trusted source. All facilities are located within the U.S. and optimized for high-mix/low volume production runs and extended lifecycle support.

Product Lifecycle Management

From design to production and beyond, NAI's product lifecycle management strategy ensures the long-term availability of COTS products through configuration management, technology refresh and obsolescence component purchase and storage.

All specifications are subject to change without notice. All product and company names are trademarks or registered trademarks of their respective holders

